


Winterizing instructions for Seagull® IV water purifier:

Do not permit antifreeze to enter the Seagull IV pressure vessel, hoses, faucet or the purification cartridge.

1. Turn off water pressure pump.
2. Open faucet to relieve pressure.
3. Disconnect inlet line from tee or elbow on cold water line. Cap the tee or elbow (see figure 1 on back). Drain the Seagull IV pressure vessel and hoses.
4. Remove and allow cartridge to air dry, then place cartridge in an *unsealed* plastic bag, store in a dry environment away from fumes, solvents or chemicals.

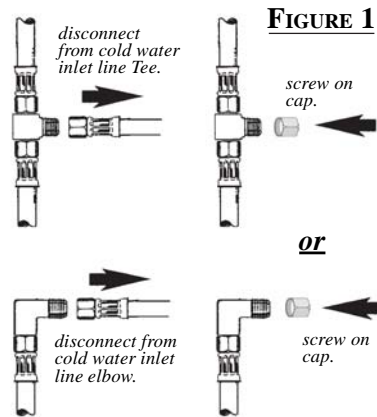

NOTE: Be sure to completely flush antifreeze from water system before re-installing the Seagull® IV housing and purification cartridge. Please see instructions that came with your purifier.

Made in **USA**



General Ecology, Inc.
151 Sheree Blvd.
Exton, PA 19341
www.generalecology.com

800-441-8166 ET
24 hr. Fax Order Line (610) 363-0412
info@generalecology.com

© 2002, General Ecology, Inc. ®, ™ trademarks of General Ecology, Inc. • All health claims not in accordance with local or state laws are hereby withdrawn.

200849 winter